


PABCO® Asphalt Shingles

Recommendations For Hot Weather Application

Asphalt shingles become softer, more flexible and less able to resist damage in hot weather. Please follow the recommendations outlined below when the ambient temperature exceeds 80 °F.

- Store shingles in shade before loading the roof. Keep bundles flat during the roof loading process.
- Lay shingles flat on the ground or on the roof. Do not drape shingles over the hips or ridges.
- Minimize foot traffic. Wear soft soled shoes. Avoid twisting or scuffing shingles with shoes or other materials.
- Shingles have a adhesive stripes added to increase wind resistance after application. As packaged, these are matched up with a release tape to prevent unintended sticking. Keep the shingles stacked in this manner to keep the adhesive matched to the release tape. Shingle pieces trimmed at hips, ridges, rakes, and valleys can quickly adhere to the shingles already applied, if they are left scattered on the roof with the sealant stripe down. Use good housekeeping practices to minimize roof debris.
- Avoid rough handling that may tear shingles or break the adhesive bond.

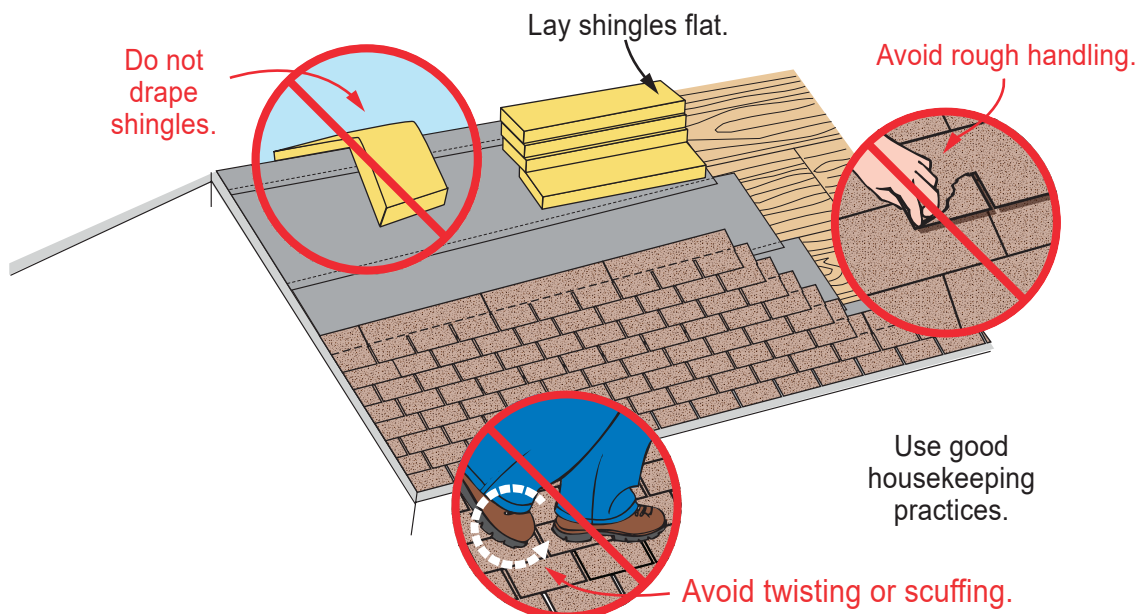

The PABCO® Limited Shingle Warranty

PABCO® warrants that our shingles are free from manufacturing defects that adversely affect their performance. PABCO® is not responsible for failures of any roof system that are not directly attributable to a PABCO® product. See the PABCO® Limited Shingle Warranty for details, limits, and conditions.